

## G-NSL 125

plastic bead for shadow joints in drywall construction

### Material:

- hard and soft PVC - UV and alkali resistant

### Features and benefits:

- Aesthetically pleasing detail
- Connection between plasterboards and walls without cracks
- Simple and quick application
- Soft lip for accommodation to any wall surface
- For plasterboards with the thickness of 12.5 mm

### Instruction for use:

Fix the bead to a plasterboard using staples or adhesive. Apply the plaster and finish it at the protruding edge of the bead. The recommended width of the joint is 10-12 mm.

### Packaging, storage and transport:


Packed in paper boxes. Store in a dry roofed place. Transport in horizontal position.

### Certifications and marks:

The product is not subject to any harmonized standard.

### Technical data:

Bead length [mm]	2500
Plasterboard thickness [mm]	12.5
Joint width [mm]	10-12
Other bead dimensions [mm]	See scheme

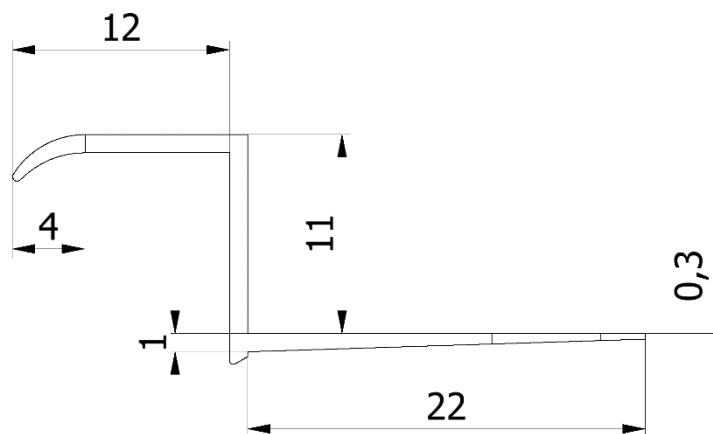

Issued on 7.2.2023.

This update invalidates all previous versions of this technical data sheet. The specified product dimensions are nominal and may range within the permitted manufacturing tolerances.